


# Road Specification for Town of Casey

## Four Rod Town Right of Way

### Amended by Motion 12/8/10

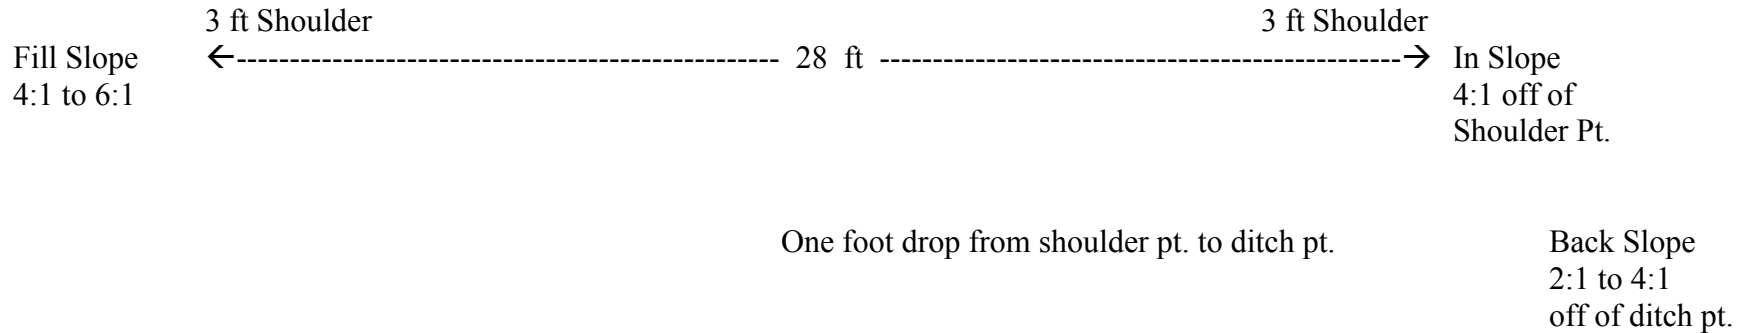

### Contractor Requirements:

1. Staking and clearing of right of way including the supervision of removal of all telephone, power lines and personal property to be completed no later than September 1<sup>st</sup> in year bid is awarded
2. Supervision of all tree removal from entire width of the right-of-way, with logs cut in lengths of a minimum of 100 inches then placed off of the right-of-way onto the property of owner.
3. On site burning and/or burial of tree stumpage.
4. Salvage of existing topsoil to spread, seed, fertilize and mulch.
5. Installation of town purchased silt fencing, gravel, and culverts including aprons per town and/or WDNR specifications.
6. Culverts are only to be installed on slopes and to avoid pooling of water.
7. Adequate ditches to meet specification range and allow proper drainage.
8. Hay bales purchased and installed on slopes where needed.
9. Existing blacktop mat is to be scarified or pulverized and recycled by mixing with gravel to form new road bed.
10. Road width must be a minimum of 28 ft., unless narrower width is authorized in writing by the Casey Town Board, with a 2% crown and an eight inch gravel base compressed to five inches.
11. Gravel specification: 5% or better binder pass through 200 sieve.
12. Roadwork posting done to DOT specifications.
13. Right-of-way clearing, including phone and/or electrical wires relocation, must be completed prior to Labor Day Weekend
14. Road reconstruction must start after Labor Day Weekend and must be completed prior to November 15<sup>th</sup>
15. Procedures for payment of work completed, procedure for acceptance by the Casey Town Board, and warranty by the contractor are accepted and adhered to as stated in Town of Casey Contractor Resolution Two of December 8, 2010 (copy enclosed).